

Inverter Drives 8400 BaseLine

0.25 ... 3.0 kW



Inverter Drives 8400 BaseLine



Contents


General information	Product key	4.10 - 4
	Equipment	4.10 - 5
	List of abbreviations	4.10 - 6
	Inverter Drives 8400	4.10 - 8
	Functions and features	4.10 - 9
Technical data	Standards and operating conditions	4.10 - 11
	Rated data 230 V	4.10 - 12
	Rated data 400 V	4.10 - 16
	Mains connection	4.10 - 20
	Connection plans	4.10 - 22
	Control connections	4.10 - 24
Modules	Memory module	4.10 - 26
Accessories	Brake resistors	4.10 - 27
	Mains chokes	4.10 - 28
	24 V power supply unit	4.10 - 29
	Brake switch	4.10 - 29
	USB diagnostic adapter	4.10 - 30
	PC system bus adapter	4.10 - 31
	Setpoint potentiometer	4.10 - 31

Inverter Drives 8400 BaseLine



General information

Product key

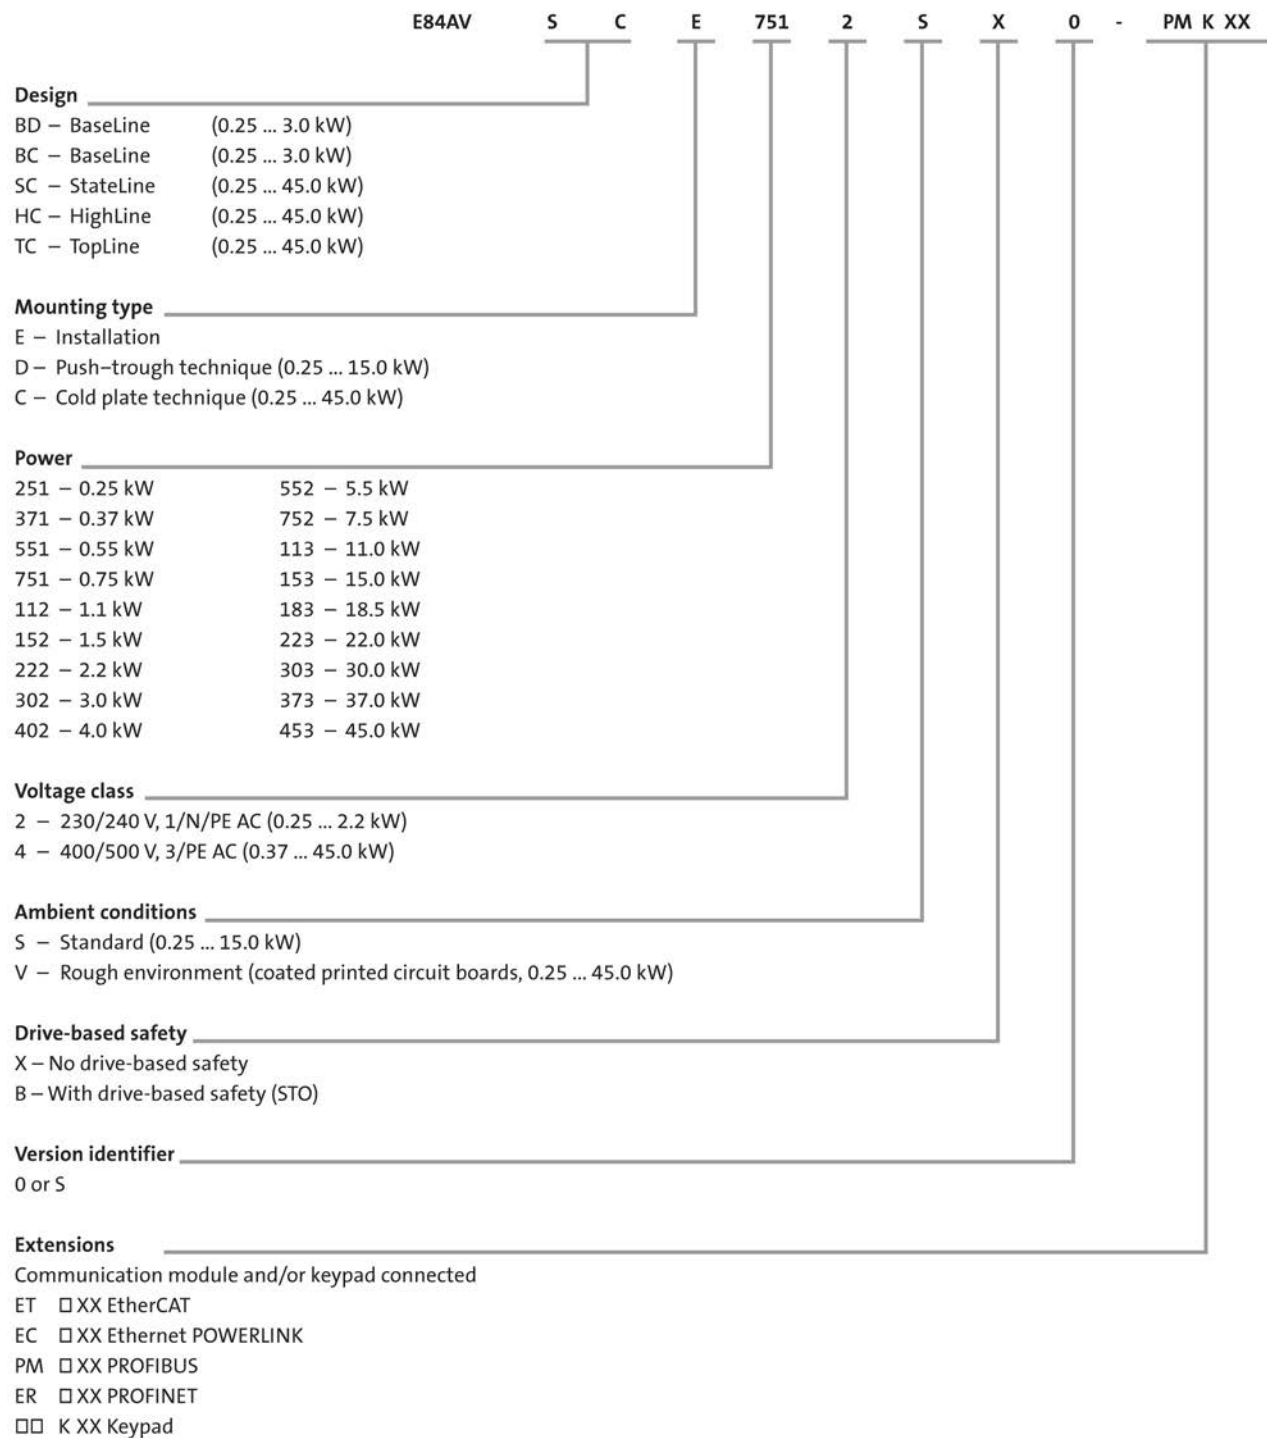


4.10

Inverter Drives 8400 BaseLine

General information



Equipment

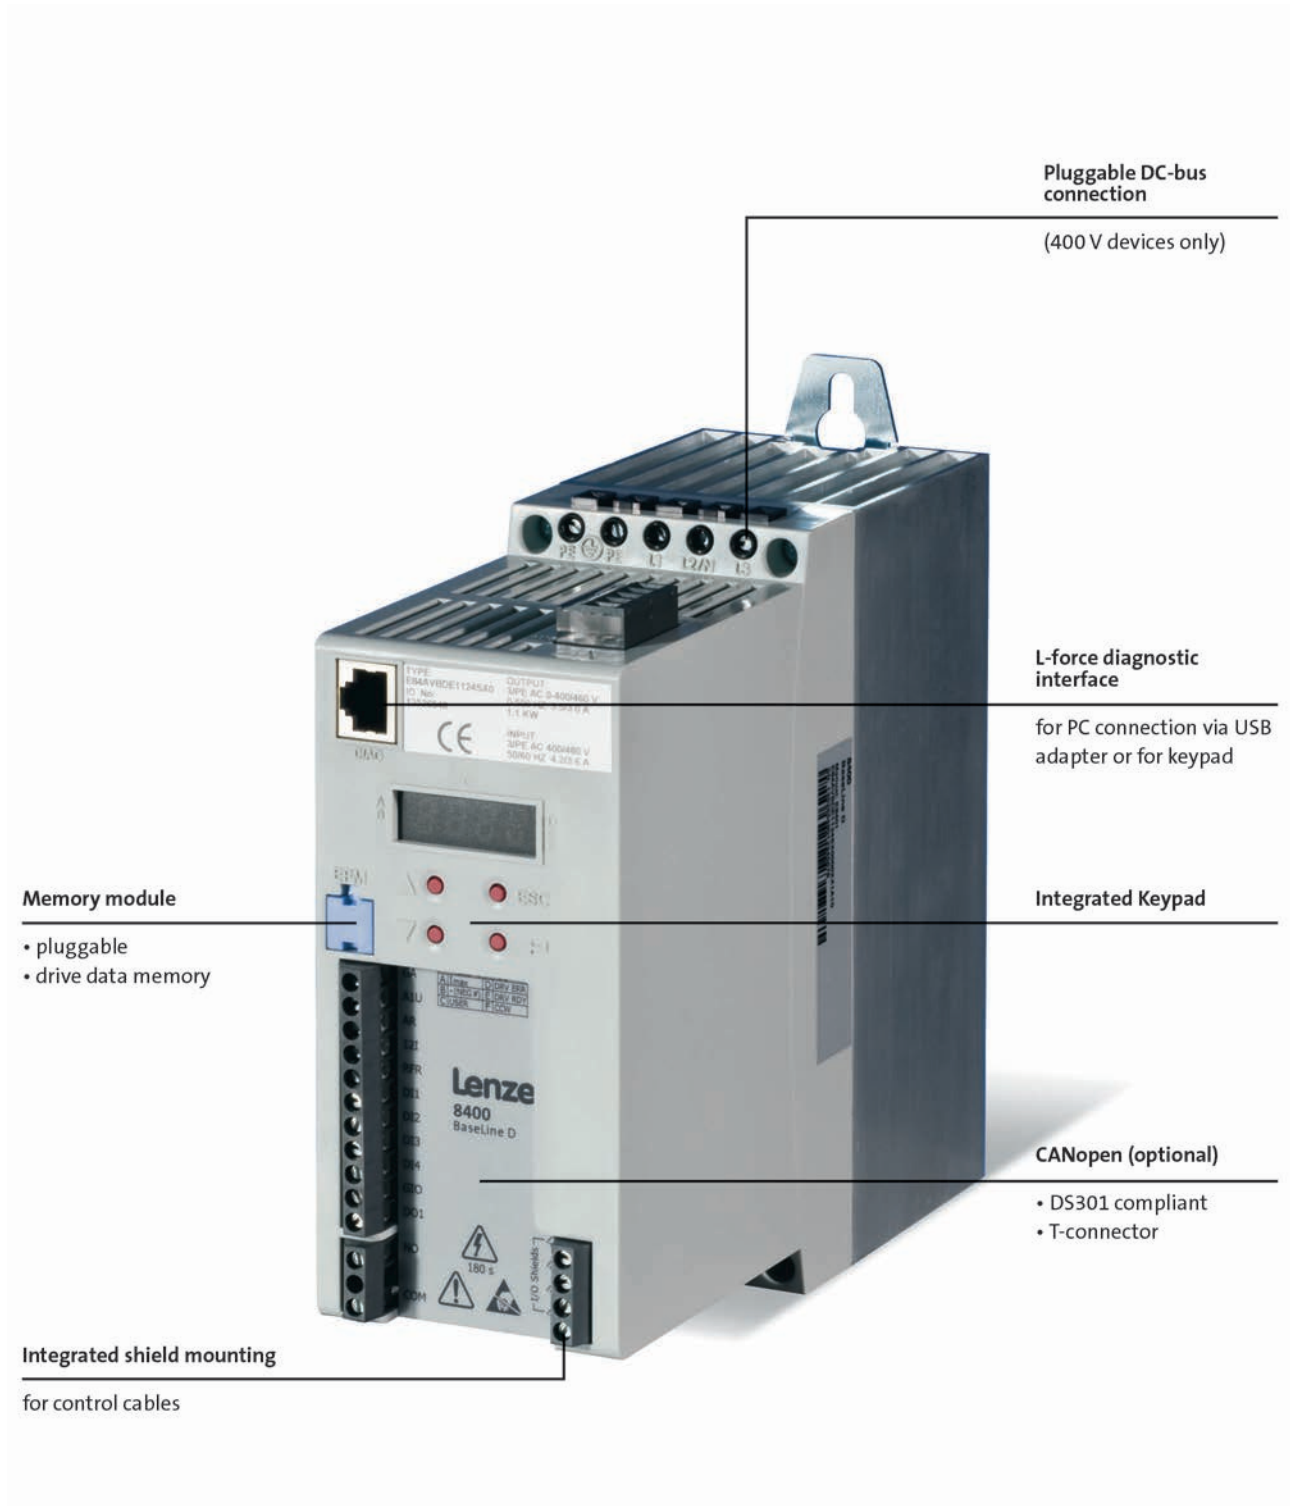

4.10

Inverter Drives 8400 BaseLine

General information



List of abbreviations

b	[mm]	Dimensions
C _{th}	[kW _s]	Thermal capacity
f _{ch}	[kHz]	Rated switching frequency
h	[mm]	Dimensions
I _{N, out}	[A]	Rated output current
I _{N, AC}	[A]	Rated mains current
m	[kg]	Mass
n _{max}	[r/min]	Max. speed
P	[kW]	Typical motor power
P _V	[kW]	Power loss
P _N	[kW]	Rated power
R _N	[Ω]	Rated resistance
t	[mm]	Dimensions
U _{AC}	[V]	Mains voltage
U _{DC}	[V]	DC supply
U _{N, AC}	[V]	Rated voltage
U _{out}	[V]	Max. output voltage

ASM	Asynchronous motor
DIAG	Slot for diagnostic adapter
DIN	Deutsches Institut für Normung e.V.
EN	European standard
EN 60529	Degrees of protection provided by enclosures (IP code)
EN 60721-3	Classification of environmental conditions; Part 3: Classes of environmental parameters and their limit values
EN 61800-3	Electrical variable speed drives Part 3: EMC requirements including special test methods
IEC	International Electrotechnical Commission
IEC 61508	Functional safety of electrical/electronic/programmable electronic safety-related systems
IM	International Mounting Code
IP	International Protection Code
MCI	Slot for communication module (module communication interface)
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

Inverter Drives 8400 BaseLine

General information



Inverter Drives 8400 BaseLine

General information



Inverter Drives 8400

Cost-efficiency, time savings and quality enhancement are the challenges of the future. Lenze is facing these challenges with its L-force product portfolio – the holistic solution portfolio with precisely matched interfaces and components. For faster configuration and commissioning, better performance and more flexibility in production.

As such, the four versions of Inverter Drives 8400 - BaseLine, StateLine, HighLine and TopLine - have been designed for consistent process optimisation – throughout your entire value-added chain. They reduce your costs, from component selection, through project planning, manufacturing and commissioning, all the way up to servicing. We call this "rightsizing".

Rightsized for versatile applications

Are you looking to control a three-phase AC motor or perform positioning with or without feedback? Then select exactly the inverter you need from the scaled solution space of the Inverter Drives 8400 with units in the power range from 0.25 kW to 45 kW. You are sure to find exactly what you are looking for here, as the modular 8400 range of inverters offers the right solution for a broad spectrum of applications.

While the BaseLine is excellent for basic applications, the TopLine offers servo qualities and thereby fulfils with the strict requirements in terms of dynamics and accuracy.

8400 BaseLine - for constant motion

The BaseLine version is the entry-level model in terms of functionality and drive behaviour. Featuring an integrated keypad and everything you would expect from a modern frequency inverter suitable for universal use, the 8400 BaseLine is the ideal solution for applications such as conveyor drives, pumps, fans or ventilators.

Two versions

Two versions of the 8400 BaseLine are available:

- BaseLine C with CANopen;
Product key: E84AVBCE□□□□SXO
- BaseLine D without communication;
Product key: E84AVBDE□□□□SXO

Inverter Drives 8400 BaseLine

General information



Functions and features

Mode	8400 BaseLine
Control types, motor control	V/f control without feedback (linear or square-law) Sensorless vector control (torque/speed)
Basic functions	Application-oriented commissioning Freely assignable user menu Data logger DC brake function Flying restart circuit S-shaped ramps for smooth acceleration Max. output frequency 300 Hz PID controller 3 fixed frequencies
Monitoring and protective measures	Short circuit Earth fault Overvoltage Motor stalling $I^2 \times t$ -Motor monitoring
Diagnostics	
Diagnostic interface	Integrated For USB diagnostic adapter in PC connection
Status display	4 LEDs
Braking operation	
Brake chopper	Integrated (400 V types)
Brake resistor	External (400 V types)

Inverter Drives 8400 BaseLine

Technical data



Inverter Drives 8400 BaseLine

Technical data




Standards and operating conditions

Mode			
Product			8400 BaseLine
Conformity			
CE			Low-Voltage Directive 2006/95/EG
Approval			
UL 508C			Power Conversion Equipment (File No. E170350)
CSA			
Certification			
			GOST-R
Degree of protection			
EN 60529 ²⁾			IP20
NEMA 250			Type 1
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (temperature: -25 °C ... +60 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: -10°C ... +55°C)
Current derating at over 45°C			2.5% / K
Site altitude			
Amsl	H _{max}	[m]	4000
Current derating at over 1000 m		[%/1000 m]	5
Vibration resistance			
Transport (EN 60721-3-2)			2M2
Operation (EN 61800-5-1)			10 Hz ≤ f ≤ 57 Hz: ±0.075 mm amplitude, 57 Hz ≤ f ≤ 150 Hz: 1.0 g
Operation (Germanischer Lloyd)			5 Hz ≤ f ≤ 13.2 Hz: ± 1 mm amplitude 13.2 Hz ≤ f ≤ 100 Hz: 0.7 g

4.10

Mode			
Product			8400 BaseLine
Supply form			
			Systems with earthed star point (TN and TT systems)
Noise emission			
EN 61800-3			Integrated RFI suppression: category C2 up to 25 m shielded motor cable ⁻¹⁾
Insulation resistance			
EN 61800-5-1			Overvoltage category III über 2000 m über NN Überspannungskategorie II
Degree of pollution			
EN 61800-5-1			2
Protective insulation of control circuits			
EN 61800-5-1			Safe mains isolation: double/reinforced insulation

¹⁾  1 - Please also refer to the Motor connection section

²⁾ Mounted and ready-to-use

Inverter Drives 8400 BaseLine



Technical data

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.



Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 230 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

						
Typical motor power						
4-pole asynchronous motor	P	[kW]	0.25	0.37	0.55	0.75
Product key						
Inverter			E84AV0002512000	E84AV0003712000	E84AV0005512000	E84AV0007512000
Mains voltage range			1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %			
	U_{AC}	[V]				
Rated mains current						
With mains choke	$I_{N, AC}$	[A]	3.0	4.2	5.4	7.0
Without mains choke	$I_{N, AC}$	[A]	3.4	5.1	6.7	8.8
Rated output current						
	$I_{N, out}$	[A]	1.7	2.4	3.0	4.0
Output current						
2 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
4 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
8 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
16 kHz	I_{out}	[A]	1.1	1.6	2.0	2.7

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	2.6	3.6	4.5	6.0
Overload time			60.0			
	t_{ol}	[s]				
Recovery time			120.0			
	t_{re}	[s]				

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	3.4	4.8	6.0	8.0
Overload time			3.0			
	t_{ol}	[s]				
Recovery time			12.0			
	t_{re}	[s]				





Inverter Drives 8400 BaseLine

Technical data



Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

						
Typical motor power						
4-pole asynchronous motor	P	[kW]	0.25	0.37	0.55	0.75
Product key						
Inverter			E84AV0002512000	E84AV0003712000	E84AV0005512000	E84AV0007512000
Power loss						
	P _V	[kW]	15.0	17.0	23.0	30.0
Max. cable length¹⁾						
Shielded motor cable	l _{max}	[m]	50			

Dimensions and weights

Dimensions						
Height	h	[mm]	165	165	165	165
Width	b	[mm]	70	70	70	70
Depth	t	[mm]	144	144	162	162
Mass						
	m	[kg]	1.2	1.2	1.2	1.2

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.


Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 230 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
Product key					
Inverter			E84AV□□□1122□□0	E84AV□□□1522□□0	E84AV□□□2222□□0
Mains voltage range					
	U_{AC}	[V]	1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
Rated mains current					
With mains choke	$I_{N, AC}$	[A]	9.9	11.8	15.7
Without mains choke	$I_{N, AC}$	[A]	12.0	13.7	22.0
Rated output current					
	$I_{N, out}$	[A]	5.5	7.0	9.5
Output current					
2 kHz	I_{out}	[A]	5.5	7.0	9.5
4 kHz	I_{out}	[A]	5.5	7.0	9.5
8 kHz	I_{out}	[A]	5.5	7.0	9.5
16 kHz	I_{out}	[A]	3.7	4.7	6.3

Data for 60 s overload

Max. output current			8.3	10.5	14.3
	$I_{max, out}$	[A]			
Overload time			60.0		
	t_{ol}	[s]			
Recovery time			120.0		
	t_{re}	[s]			

Data for 3 s overload

Max. short-time output current			11.0	14.0	19.0
	$I_{max, out}$	[A]			
Overload time			3.0		
	t_{ol}	[s]			
Recovery time			12.0		
	t_{re}	[s]			


Inverter Drives 8400 BaseLine

Technical data



Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
Product key					
Inverter			E84AV□□□1122□□0	E84AV□□□1522□□0	E84AV□□□2222□□0
Power loss					
	P _V	[kW]	43.0	54.0	76.0
Max. cable length ¹⁾					
Shielded motor cable	l _{max}	[m]	50		

Dimensions and weights

Dimensions					
Height	h	[mm]	165	215	215
Width	b	[mm]	70	70	70
Depth	t	[mm]	162	162	162
Mass					
	m	[kg]	1.4	1.9	1.9

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.


Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 400 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	0.37	0.55	0.75
Product key					
Inverter			E84AV□□□3714□□0	E84AV□□□5514□□0	E84AV□□□7514□□0
Mains voltage range					
	U_{AC}	[V]	3/PE AC 180 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
Rated mains current					
With mains choke	$I_{N, AC}$	[A]	1.4	1.8	2.2
Without mains choke	$I_{N, AC}$	[A]	1.8	2.3	3.2
Rated output current					
	$I_{N, out}$	[A]	1.3	1.8	2.4
Output current					
2 kHz	I_{out}	[A]	1.3	1.8	2.4
4 kHz	I_{out}	[A]	1.3	1.8	2.4
8 kHz	I_{out}	[A]	1.3	1.8	2.4
16 kHz	I_{out}	[A]	0.9	1.2	1.6

Data for 60 s overload

Max. output current					
	$I_{max, out}$	[A]	2.0	2.7	3.6
Overload time					
	t_{ol}	[s]		60.0	
Recovery time					
	t_{re}	[s]		120.0	

Data for 3 s overload

Max. short-time output current					
	$I_{max, out}$	[A]	2.3	3.2	4.2
Overload time					
	t_{ol}	[s]		3.0	
Recovery time					
	t_{re}	[s]		12.0	


Inverter Drives 8400 BaseLine

Technical data



Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	0.37	0.55	0.75
Product key					
Inverter			E84AV□□□3714□□0	E84AV□□□5514□□0	E84AV□□□7514□□0
DC supply					
	U_{DC}	[V]	DC 455 V -0 % ... 775 V +0 %		
Rated DC-bus current					
	$I_{N, DC}$	[A]	2.2	2.8	3.6
Power loss					
	P_V	[kW]	15.0	22.0	29.0
Max. cable length¹⁾					
Shielded motor cable	l_{max}	[m]	50		

Brake chopper rated data

Rated power, Brake chopper					
	P_N	[kW]	1.3	1.3	1.3
Max. output power, Brake chopper					
	$P_{max, 1}$	[kW]	1.3	1.3	1.3
Min. brake resistance					
	R_{min}	[Ω]	390.0	390.0	390.0

Dimensions and weights

Dimensions					
Height	h	[mm]	165	165	165
Width	b	[mm]	70	70	70
Depth	t	[mm]	162	162	162
Mass					
	m	[kg]	1.2	1.2	1.2

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

4.10

Inverter Drives 8400 BaseLine



Technical data

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.


Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 400 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

						
Typical motor power						
4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20	3.00
Product key						
Inverter			E84AV□□□1124□□□	E84AV□□□1524□□□	E84AV□□□2224□□□	E84AVB□□3024□□□
Mains voltage range			3/PE AC 180 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %			
	U_{AC}	[V]				
Rated mains current						
With mains choke	$I_{N, AC}$	[A]	3.2	3.6	5.0	7.1
Without mains choke	$I_{N, AC}$	[A]	4.2	4.7	6.2	10.2
Rated output current						
	$I_{N, out}$	[A]	3.2	3.9	5.6	7.3
Output current						
2 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
4 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
8 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
16 kHz	I_{out}	[A]	2.1	2.6	3.7	4.9

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	4.8	5.9	8.4	11.0
Overload time			60.0			
	t_{ol}	[s]				
Recovery time			120.0			
	t_{re}	[s]				

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	5.6	6.8	9.8	12.4
Overload time			3.0			
	t_{ol}	[s]				
Recovery time			12.0			
	t_{re}	[s]				

Inverter Drives 8400 BaseLine

Technical data



Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

Typical motor power						
4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20	3.00
Product key						
Inverter			E84AV□□□□1124□□□□	E84AV□□□□1524□□□□	E84AV□□□□2224□□□□	E84AVB□□□3024□□□□
DC supply			DC 455 V -0 % ... 775 V +0 %			
	U _{DC}	[V]				
Rated DC-bus current						
	I _{N, DC}	[A]	5.1	5.8	7.6	10.0
Power loss						
	P _V	[kW]	42.0	48.0	66.0	91.0
Max. cable length¹⁾						
Shielded motor cable	I _{max}	[m]	50			

Brake chopper rated data

Rated power, Brake chopper						
	P _N	[kW]	2.9	2.9	3.5	7.3
Max. output power, Brake chopper						
	P _{max, 1}	[kW]	2.9	2.9	3.5	7.3
Min. brake resistance						
	R _{min}	[Ω]	180.0	180.0	150.0	82.0

Dimensions and weights

Dimensions					
Height	h	[mm]	165	165	215
Width	b	[mm]	70	70	70
Depth	t	[mm]	162	162	162
Mass					
	m	[kg]	1.4	1.4	1.9

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Mains connection

- ▶ The mains fuse and cable cross-section specifications are for a mains connection of 1 x 230V or 3 x 400V.
- ▶ Class gG/gI fuses or class gRL semiconductor fuses.
- ▶ The cable cross-sections apply to PVC-insulated copper cables.
- ▶ Use for installation with UL-approved cables, fuses and brackets.

Operation with mains choke

Typical motor power	Mains voltage	Product key	Circuit breaker	Fuse		Mains connection
				EN 60204-1	UL	
4-pole asynchronous motor		Inverter				Cross-section (with mains choke)
P	U _{AC}		I	I	I	q
[kW]	[V]		[A]	[A]	[A]	[mm ²]
0.25	1 AC 180 ... 264	E84AV□□□2512□□□0	C6	6	6	1.0
0.37		E84AV□□□3712□□□0			10	
0.55		E84AV□□□5512□□□0	C10	10	15	1.5
0.75		E84AV□□□7512□□□0			20	
1.10		E84AV□□□1122□□□0			25	
1.50		E84AV□□□1522□□□0	C20	20	30	4.0
2.20		E84AV□□□2222□□□0				
0.37	3 AC 320 ... 550	E84AV□□□3714□□□0	C6	6	6	1.0
0.55		E84AV□□□5514□□□0				
0.75		E84AV□□□7514□□□0				
1.10		E84AV□□□1124□□□0	C10	10	10	1.5
1.50		E84AV□□□1524□□□0				
2.20		E84AV□□□2224□□□0				
3.00		E84AV□□□3024□□□0				

Operation without mains choke

Typical motor power	Mains voltage	Product key	Circuit breaker	Fuse		Mains connection
				EN 60204-1	UL	
4-pole asynchronous motor		Inverter				Cross-section (without mains choke)
P	U _{AC}		I	I	I	q
[kW]	[V]		[A]	[A]	[A]	[mm ²]
0.25	1 AC 180 ... 264	E84AV□□□2512□□□0	C6	6	6	1.0
0.37		E84AV□□□3712□□□0			10	
0.55		E84AV□□□5512□□□0	C10	10	15	1.5
0.75		E84AV□□□7512□□□0			20	
1.10		E84AV□□□1122□□□0			25	
1.50		E84AV□□□1522□□□0	C25	25	30	4.0
2.20		E84AV□□□2222□□□0				
0.37	3 AC 320 ... 550	E84AV□□□3714□□□0	C6	6	6	1.0
0.55		E84AV□□□5514□□□0				
0.75		E84AV□□□7514□□□0				
1.10		E84AV□□□1124□□□0	C10	10	10	1.5
1.50		E84AV□□□1524□□□0				
2.20		E84AV□□□2224□□□0				
3.00		E84AV□□□3024□□□0				

Inverter Drives 8400 BaseLine

Technical data




Inverter Drives 8400 BaseLine

Technical data



Connection plans

Wiring example for connecting Inverter Drives 8400 BaseLine (shown: BaseLine D) to 1 x 230 V

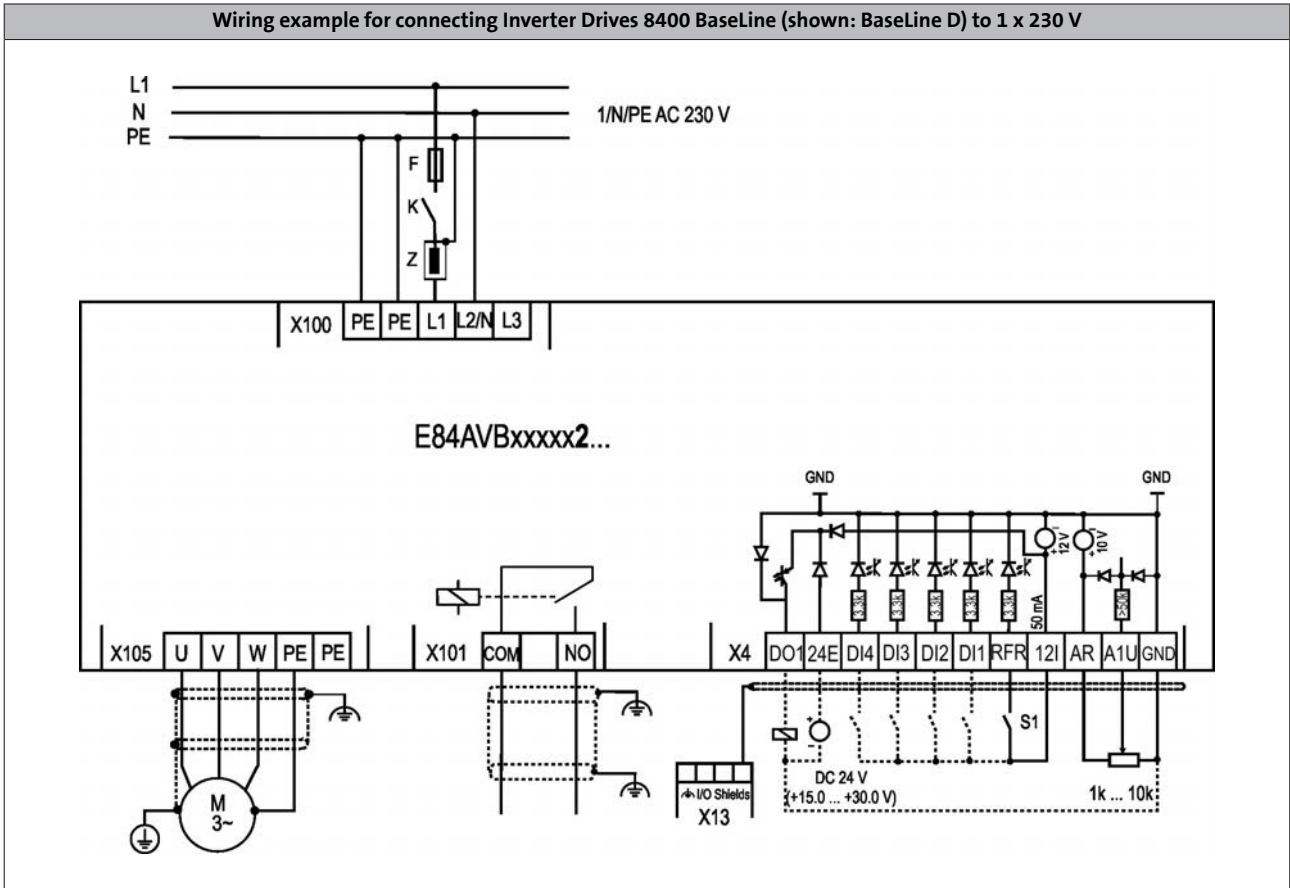

4.10


Inverter Drives 8400 BaseLine

Technical data



Connection plans

Wiring example for connecting Inverter Drives 8400 BaseLine (shown: BaseLine D) to 3 x 400 V

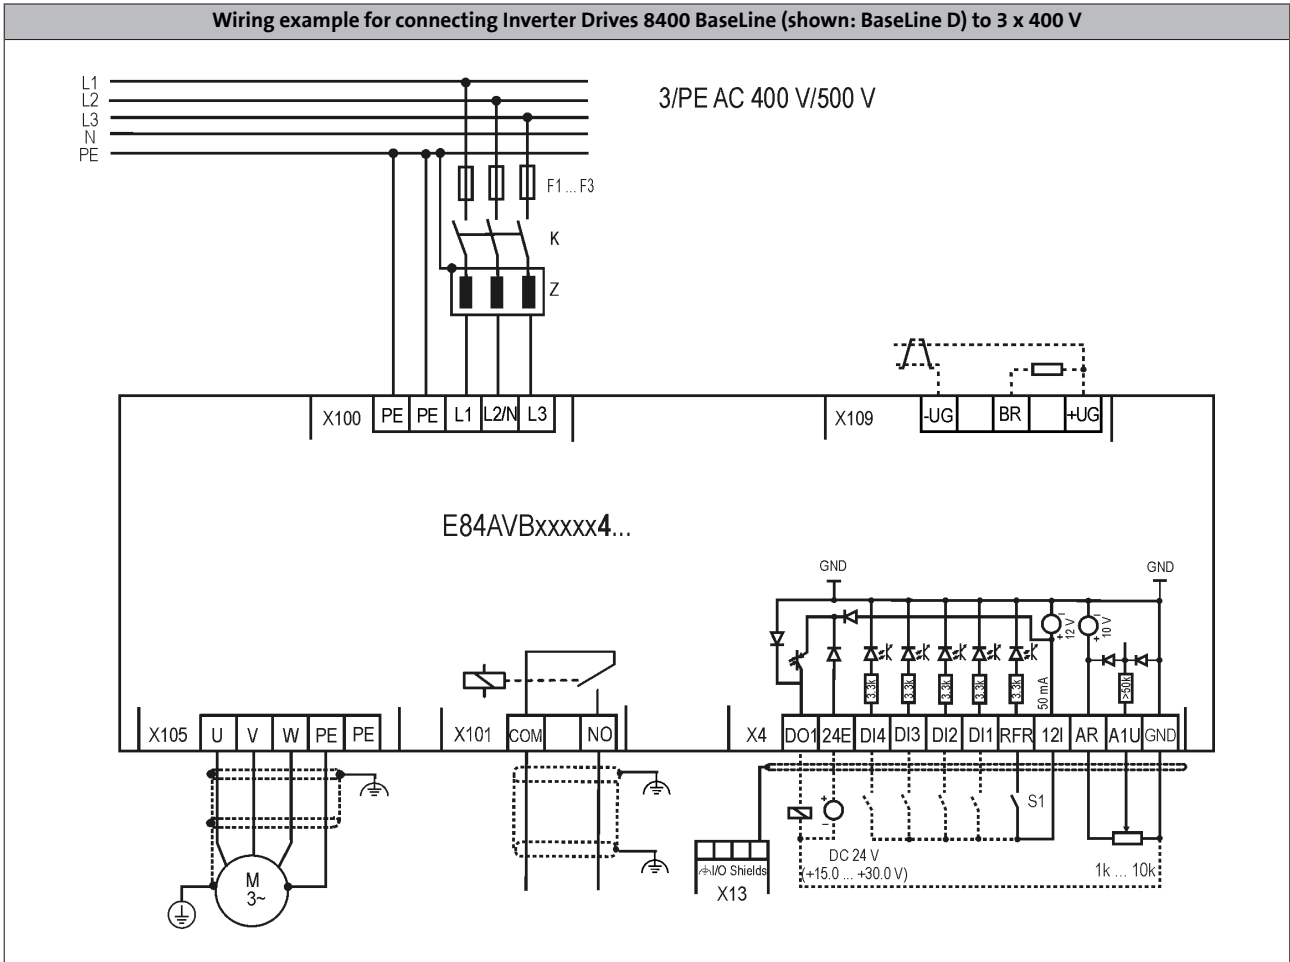

4.10

Inverter Drives 8400 BaseLine

Technical data



Control connections

Mode	8400 BaseLine
Analog inputs	
Number	1 Switchable: voltage or current input
Resolution	10 bits
Value range	0 ... 10V, 0/4 ... 20mA
Digital inputs	
Number	5
Switching level	PLC (IEC 61131-2)
Max. input current	11mA
Digital outputs	
Number	1
Switching level	PLC (IEC 61131-2)
Max. output current	50mA
Relay	
Number	1
Contact	NO contact
AC connection	250V, 3A
DC connection	24V, 2A ... 240V, 0.16A
Interfaces	
CANopen	functional insulated Max. baud rate 1000 kbps Integriert (BaseLine C)

4.10


Inverter Drives 8400 BaseLine

Technical data




Control connections


Connection of analog inputs and outputs



Connection of digital inputs and outputs

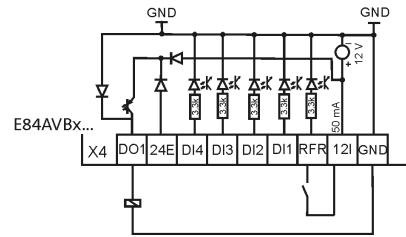

CANopen connection

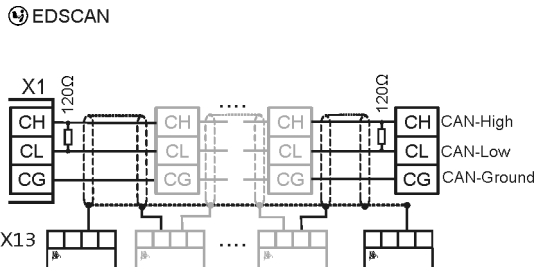

Inverter Drives 8400 BaseLine

Modules



Memory module

All drive settings for the 8400 are stored on the memory module, which is a pluggable memory chip. The memory module ensures that drives can be replaced quickly and without errors being made.

Mode	Features	Product key
Memory module	<ul style="list-style-type: none">• For 8400 BaseLine, 8400 motec• Packaging unit: 12 items	E84AYM20S/M

- ▶ Each inverter is equipped with a memory module in the factory

Inverter Drives 8400 BaseLine

Accessories



Brake resistors

An external brake resistor is required to brake high moments of inertia or in the event of prolonged operation in generator mode; this resistor converts braking energy into heat.

The brake resistors recommended in the table below have been dimensioned for approx. 1.5 times the regenerative power, with a cycle time of 15/135 s (brake/rest ratio). These brake resistors generally meet the usual requirements of standard applications.

The brake resistors are fitted with a thermostat (potential-free NC contact).



ERBM...(IP50) brake resistor

Typical motor power	Mains voltage	Product key		Rated resistance	Rated power	Thermal capacity	Dimensions	Mass
		Inverter	Brake resistor					
4-pole asynchronous motor								
P	U _{AC}			R _N	P _N	C _{th}	h x b x t	m
[kW]	[V]			[Ω]	[kW]	[KWs]	[mm]	[kg]
0.37	3 AC 320... 550	E84AV□□□3714□□0	ERBM390R100W	390.0	100.0	15	235 x 20.6 x 40	0.4
0.55		E84AV□□□5514□□0						
0.75		E84AV□□□7514□□0						
1.10		E84AV□□□1124□□0	ERBP180R200W	180.0	200.0	30	240 x 41 x 122	1.0
1.50		E84AV□□□1524□□0						
2.20		E84AV□□□2224□□0	ERBP180R300W	180.0	300.0	45	320 x 41 x 122	1.4
3.00		E84AV□□□3024□□0						

► Brake resistor connection requires a connector (product key: EWS0074/M).

- ▶ Data sheet on ERBM brake resistors
DS_ZB_ERBM_0001
Available for download at Lenze website. Data
- ▶ sheet on ERBP brake resistors
DS_ZB_ERBP_0001
Available for download at Lenze website.

- ▶ Data sheet on ERBP brake resistors
DS_ZB_ERBP_0001
Available for download at Lenze website
- ▶ Data sheet on ERBS brake resistors
DS_ZB_ERBS_0001
Available for download at Lenze website.

Inverter Drives 8400 BaseLine

Accessories



Mains chokes

A mains choke is an inductive resistor which is connected in the mains cable of the inverter. The use of a mains choke provides the following advantages:

- **Fewer effects on the mains:**
The wave form of the mains current is a close approximation to a sine wave.
- **Reduction in the effective mains current:**
Reduction of mains, cable and fuse loads

Mains chokes can be used without restrictions in conjunction with RFI filters and/or sinusoidal filters.



Mains choke

Please note:

: The use of a mains choke slightly reduces the mains voltage at the input of the inverter - the typical voltage drop across the mains choke at the rated values is around 5%.

Typical motor power 4-pole asynchronous motor	Mains voltage U_{AC}	Product key		Rated current I_N	Dimensions h x b x t	Mass m
		Inverter	Mains choke			
P [kW]	[V]			[A]	[mm]	[kg]
0.25	1 AC 180 ... 264	E84AV□□□2512□□□	ELN1-0900H005	5.00	75 x 66 x 82	1.1
0.37		E84AV□□□3712□□□				
0.55		E84AV□□□5512□□□	ELN1-0500H009	9.00		
0.75		E84AV□□□7512□□□				
1.10		E84AV□□□1122□□□	ELN1-0250H018	18.0		
1.50		E84AV□□□1522□□□				
2.20		E84AV□□□2222□□□				
0.37	3 AC 320 ... 550	E84AV□□□3714□□□	ELN3-1500H003-001	2.50	105 x 129 x 61	1.2
0.55		E84AV□□□5514□□□				
0.75		E84AV□□□7514□□□				
1.10		E84AV□□□1124□□□	ELN3-0680H006-001	6.10		
1.50		E84AV□□□1524□□□				
2.20		E84AV□□□2224□□□				
3.00		E84AV□□□3024□□□				

4.10

Inverter Drives 8400 BaseLine

Accessories



24 V power supply unit

External power supply units are available for supplying the control electronics of the 8400 StateLine, HighLine or TopLine. With an external supply, the inverters can be parameterised and diagnosed while the mains input is deenergised.



24 V power supply unit

Rated data

Product key			EZV1200-000	EZV2400-000	EZV4800-000	EZV1200-001	EZV2400-001	EZV4800-001
Rated voltage								
AC	$U_{N, AC}$	[V]	230			400		
Rated mains current								
	$I_{N, AC}$	[A]	0.8	1.2	2.3	0.3	0.6	1.0
Output voltage								
	U_{out}	[V]	DC 22.5 ...28.5					
Rated current								
	I_N	[A]	5.00	10.0	20.0	5.00	10.0	20.0
Dimensions								
Height	h	[mm]	130					
Width	b	[mm]	55	85	157	73	85	160
Depth	t	[mm]	125					
Mass								
	m	[kg]	0.8	1.2	2.5	1.0	1.1	1.9

4.10

Brake switch

The brake switch consists of a rectifier and an electronic circuit breaker for the switching of an electromechanical brake switch. The brake switch is mounted on the control cabinet plate by means of two screws. Control is performed using a digital output on the inverter.



Brake switch

Mode	Features	Product key
Half-wave rectification	<ul style="list-style-type: none"> Input voltage: AC 320 ... 550 V Output voltage: DC 180 V (at AC 400 V), DC 225 V (at AC 500 V) Max. brake current: DC 0.61 A Enclosure: IP00 	E82ZWBRE
Bridge rectification	<ul style="list-style-type: none"> Input voltage: AC 180 ... 317 V Output voltage: DC 205 V (at AC 230 V) Max. brake current: DC 0.54 A Enclosure: IP00 	E82ZWBRB

▶ Data sheet on E82ZWBRE brake switch
DS_Brake_8400_0001
 Available for download at Lenze website

▶ Data sheet on E82ZWBRB brake switch
DS_Brake_8400_0002
 Available for download at Lenze website

Inverter Drives 8400 BaseLine



Accessories

USB diagnostic adapter

The operation, parameter setting and diagnostics of the Inverter Drives 8400 and the Servo Drives 9400 via the L-force diagnostics is made with the keypad X400 or a PC. The connection of a PC can be made via a USB interface and the USB diagnostic adapter.


For connecting the USB diagnostic adapter with the L-force diagnostics interface (DIAG) at the inverter, three different connecting cables are separately available in the lengths 2.5 m, 5 m and 10 m. The connection can be established during operation. The engineering tools EASY Starter or Engineer can be used to carry out the operation, parameter setting or diagnostics of the inverters. Both tools have simple intuitive surfaces. This enables a quick and easy commissioning.

Optionally to the USB diagnostic adapter, the PC system bus adapter can be used. For this purpose, a CANopen interface must be available at the inverter.



USB diagnostic adapter incl. connecting cable to the PC

- The engineering tools EASY Starter or Engineer are used for operation, parameter setting and diagnostics of the inverters.

Mode		Features	Product key
USB diagnostic adapter		<ul style="list-style-type: none"> • Input-side voltage supply via USB connection on PC • Output-side voltage supply via inverter's diagnostic interface • Diagnostic LEDs • Electrical isolation of PC and inverter • Hot-pluggable 	E94AZCUS

Connecting cables for USB diagnostic adapter

Mode	Features	Product key
Connecting cable for USB diagnostic adapter	• Length: 2.5 m	EWL0070
	• Length: 5 m	EWL0071
	• Length: 10 m	EWL0072

Inverter Drives 8400 BaseLine

Accessories



PC system bus adapter

Instead of a PC, the 8400 inverter drives can alternatively be operated, parameterised and diagnosed using the CANopen interface and a PC system bus adapter, which is required instead of a USB diagnostic adapter. This adapter plugs into the parallel interface or the USB connection of the PC. The corresponding drivers are installed automatically. Depending on the version, the adapter is supplied with voltage via the DIN, PS2 or USB connection of the PC. The CANopen interface is integrated or available with a variant (BaseLine C).

Advantage:

- Operation, parameterisation and diagnostics in parallel with the keypad
- In interconnected systems, multiple inverters can be addressed simultaneously from one point (remote parameterisation via CANopen)



EMF2173IBV003 adapter

Mode	Features	Product key
PC system bus adapter	• Voltage supply via DIN port on PC	EMF2173IB
	• Voltage supply via PS2 connection on PC	EMF2173IBV002
	• Voltage supply via PS2 connection on PC • Electrical isolation from the bus	EMF2173IBV003
	• Voltage supply via USB port on PC • Electrical isolation from the bus	EMF2177IB

Setpoint potentiometer

The setpoint selection (e.g. speed) can be made via an external potentiometer.

The setpoint potentiometer is connected to the analogue input terminal of the inverter. A scale and a rotary knob are also available.



Setpoint potentiometer with scale and rotary knob

Mode	Product key
Potentiometer 10 kOhm / 1 Watt	ERPD0010K0001W
Rotary knob, 36 mm diameter	ERZ0001
Scale 0 ... 100%, 62 mm diameter	ERZ0002