

SMVector IP31

frequency inverter



Flexible, simple, economical



Lenze



SMVector IP31 | Simple Vector Control

Simplicity

By making Lenze products easy to install, program and commission, we can provide the ideal motor control solution for both OEM designers and electrical systems engineers. An innovative removable EPM chip feature allows instant programming of multiple drives before or after installation, and a simple intuitive front panel display also facilitates easy in-situ operation.

Flexibility

The SMVector range of inverter drives offer fast dynamic torque response, sophisticated auto-tuning and impressive low speed operation from a compact, and simple to use package. The SMVector range is designed for motor applications where dynamic speed and torque control are required, ideal for conveyors, packaging lines and Fan and Pump systems.

Quality

A firm commitment to design quality and continuous development of our products ensures both high performance and reliability. Manufacturing facilities have recently been expanded with manufacturing systems and quality control procedures also upgraded to provide the highest possible quality product is delivered to customers worldwide.

Technical Support

With a worldwide network of Lenze branches and certified distributors we have hundreds of experienced engineers on hand to help customers at all levels to solve problems and find the best solutions for their applications. End users can also be assured that Lenze is always there throughout the lifecycle of its products. Technical information, literature and guides are also available from a multi-language website.

SMVector IP31 | features and benefits

The SMVector continues our tradition for innovative products in the AC drive market. Its performance and flexibility make it an attractive solution for a broad range of applications including:

- ▶ Food processing machinery
- ▶ Packaging machinery
- ▶ Material handling/conveying systems
- ▶ Fan and Pump systems

Superior Performance

- ▶ Modes of Operation:
 - V/Hz (Constant and Variable)
 - Enhanced V/Hz (Constant and Variable)
 - Vector Speed Control
 - Vector Torque Control
- ▶ Dynamic Torque Response
- ▶ Sophisticated Auto-tuning (Motor Calibration)
- ▶ Impressive Low Speed Operation

Flexible Power Ranges

- ▶ International Voltages:
 - 120/240 V, 1 Φ (up to 1.1 kW)
 - 200/240 V, 1/3 Φ (up to 2.2 kW)
 - 200/240 V, 3 Φ (up to 15 kW)
 - 400/480 V, 3 Φ (up to 30 kW)
 - 480/600 V, 3 Φ (up to 30 kW)

Simplicity

- ▶ Intuitive User Interface
- ▶ Electronic Memory Module (EPM)

Field-bus Connectivity

- ▶ DeviceNet
- ▶ Modbus-RTU
- ▶ LECOM
- ▶ CANopen
- ▶ EtherNet/IP
- ▶ PROFIBUS-DP



SMVector IP31

Electronic Programming Module (EPM)

Electronic Programming Module (EPM)

Program the SMVector quickly and easily using the electronic programming module (EPM). The EPM stores the drive's parameter configuration and simplifies initial setup:


- ▶ Three ways to program the EPM:
 1. Use the intuitive integrated keypad
 2. Program in a Microsoft Windows™ environment with Techlink.
 3. Use the portable EPM programmer.
- ▶ The EPM saves time and money:
 1. Create your parameter profile and archive to the EPM programmer, a master EPM or your PC.
 2. Insert the EPM into the EPM programmer and copy parameters in a matter of seconds!
 3. Plug the EPM into the drive and it is fully programmed and ready to go.

- ▶ Improve efficiency:
Program the drive anytime and anywhere where it makes sense during your manufacturing or commissioning process. You can even plug in a fully programmed EPM before connecting the drive to power. Now the drive is ready and waiting for power to be connected.
- ▶ Safeguard your configuration:
When you program the EPM your parameter settings are automatically archived. This truly unique feature allows the SMVector to be reset to factory default settings or to customer settings.

The EPM. Another example of the innovative thinking that separates Lenze from other manufacturers.



EPM Programmer

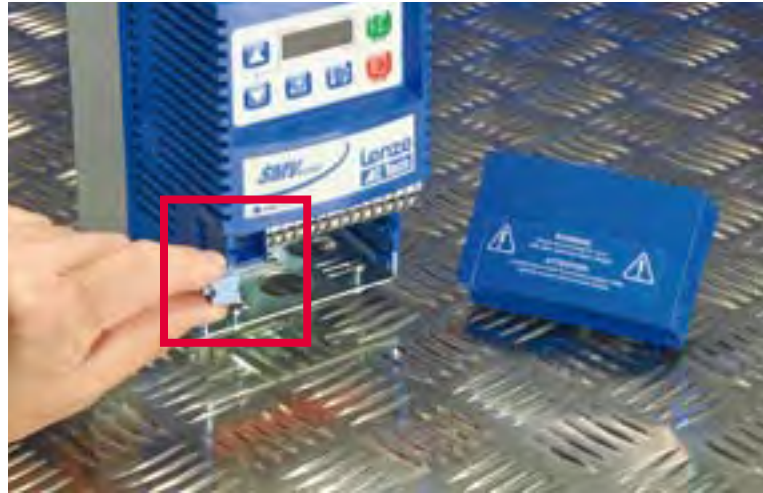

EPM – OEM Magic!

The robust plug-in EPM chip is a fantastic feature for companies using the SMVector drive in a production line product. The EPM chip contents can also be duplicated instantly using the electronic programming module, allowing OEM builders to set-up drives on duplicate machines at the push of a button.

Maintenance & Replacements

Contained in a small but robust 10 mm square housing the EPM can easily be posted out to customers in the field. This allows the machine manufacturer to avoid the cost of sending out an engineer to re-commission a drive.

In the unlikely event that a drive fails, a replacement can be despatched to the site and a maintenance operative or electrician can replace the drive and then simply transfer the EPM chip from the old unit to the new drive and it will be ready to run.




Ideal for identical repeat applications.

SMVector IP31 | performance


Exceptional Starting Torque

Overpower demanding applications. The SMVector is peerless in controlling the motor's ability to convert current into torque. In this example, the SMVector is started into a stiff 195% torque load. Not only does the motor start the load, but it also delivers a full 195% torque while accelerating to 50 Hz in 8 seconds.

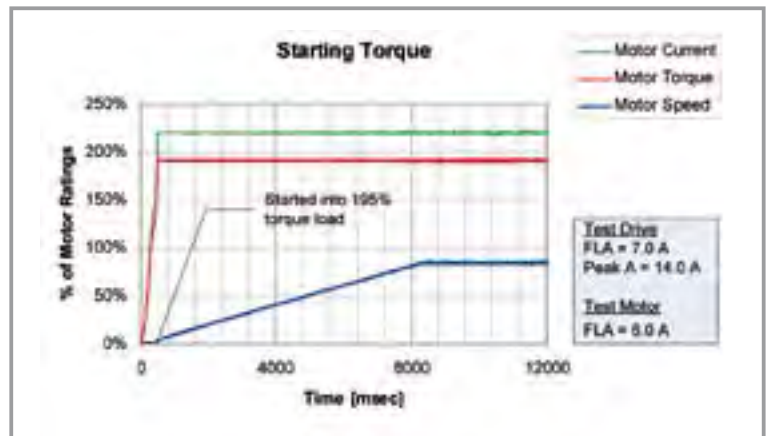


Dynamic Speed Regulation

Shock loads are no match for the SMVector. Here an instantaneous 100% load is dealt with in a mere 0.15 seconds. Remarkably, this level of speed regulation is achieved open loop without the additional cost of a feedback device associated with closed loop systems.

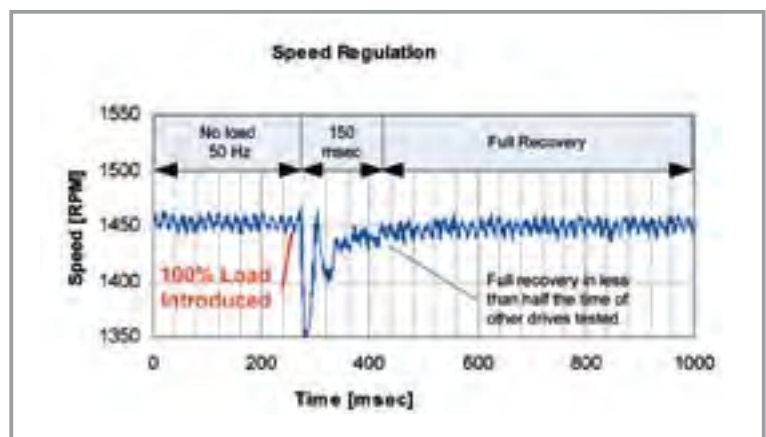

Quick Acceleration

Motors controlled by the SMVector benefit from a sophisticated motor control algorithm that drives motor performance to maximum levels. In this application the motor is able to drive a 165% torque load while accelerating from 0 to 100% speed in an impressive 0.33 seconds.

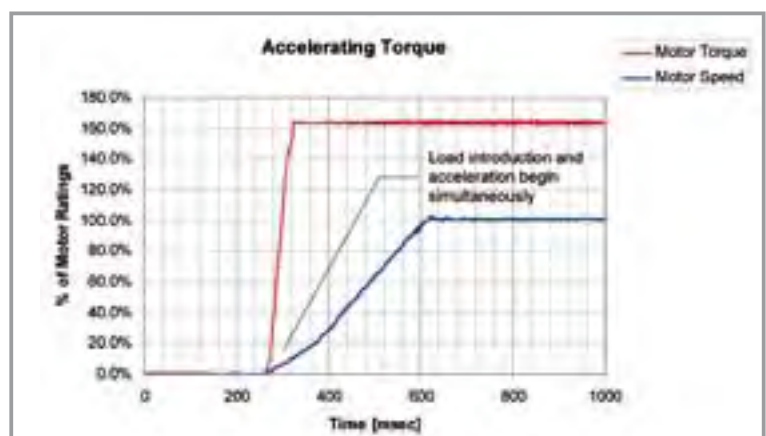

**All Performance figures are application dependant*

SMVector IP31 | specifications

World Class Control

Modes of Operation

- ▶ Open Loop Flux Vector Speed or Torque Control
- ▶ V/Hz (Constant or Variable)
- ▶ Enhanced V/Hz with Auto-tuning

Performance

- ▶ 150% overload for 60 sec's
- 200% overload for 15 sec's (up to 7.5kW)
- 180% overload for 15 sec's (11kW to 30kW)

Acceleration/Deceleration Profiles

- ▶ Two Independent Accel Ramps
- ▶ Two Independent Decel Ramps
- ▶ Linear
- ▶ S-Type
- ▶ Auxiliary Ramp-to-Stop

Output Frequency

- ▶ 500 Hz Standard
- ▶ 1,000 Hz Optional

Switching Frequency

- ▶ 4, 6, 8, 10 (kHz) (Optional 16 kHz)

Universal Logic Assertion (Selectable)

- ▶ Positive Logic Input
- ▶ Negative Logic Input

Braking Functions

- ▶ DC Injection Braking
- ▶ Optional dynamic Braking
- ▶ Motor Flux braking

Speed/Torque Control

- ▶ Keypad
- ▶ Jog
- ▶ Floating Point Control
- ▶ Voltage: Scalable 0 –10 VDC
- ▶ Current: Scalable 4 – 20 mA
- ▶ Potentiometer
- ▶ Fieldbus
- ▶ 8 Preset Speeds
- ▶ Flying start

Process Control

- ▶ PID Modes: Direct and Reverse Acting
- ▶ PID Sleep Mode
- ▶ User defined units
- ▶ Sequencer
- ▶ Pump-Rinse Mode

Vigilant System Protection

Voltage Monitoring

- ▶ Low DC Bus V Protection
- ▶ High DC Bus V Protection
- ▶ Low Line V Compensation
- ▶ Phase Loss Protection

Current Monitoring

- ▶ Motor Overload Protection
- ▶ Current Limiting Safeguard
- ▶ Ground Fault
- ▶ Short Circuit Protection

Loss of Follower Management

- ▶ Protective Fault
- ▶ Go to Preset Speed or Preset Setpoint
- ▶ Initiate System Notification

Over Temperature Protection

Comprehensive Diagnostic Tools

Real Time Monitoring

- ▶ 8 Register Fault History
- ▶ Software Version
- ▶ DC Bus Voltage (V)
- ▶ Motor Voltage (V)
- ▶ Output Current (%)
- ▶ Motor Current (A)
- ▶ Motor Torque (%)
- ▶ Output Frequency/ RPM
- ▶ Power (kW)
- ▶ Energy Consumption (kWh)
- ▶ Heatsink Temperature (°C)
- ▶ 0 – 10 VDC Input (User Defined)
- ▶ 4 – 20 mA Input (User Defined)
- ▶ PID Feedback (User Defined)
- ▶ Analog Output (Speed, Load, Torque, kW)
- ▶ Terminal Status
- ▶ Keypad Status
- ▶ Elapsed Run Time (Hours)
- ▶ Elapsed Power on Time (Hours)

Status Outputs

- ▶ Programmable Form "A" Relay Output
- ▶ Programmable Open Collector Output
- ▶ Scalable 0-10 VDC / 2-10 VDC Analog Output

Environmental Capabilities

Ambient Temperature

- ▶ -10 to 55°C
- ▶ Derate 2.5% per °C Above 40°C

EMC Conformance

- ▶ CE EMC Directive (EN61800-3) with optional external EMC filter (First and second environment, category C1 and C2).

Global Standards

- ▶ UL, cUL
- ▶ CE Low Voltage Directive (EN61800-5-1) (Europe)
- ▶ GOST (Russia/Ukraine)
- ▶ C-Tick (Australia/New Zealand)
- ▶ RoHs
- ▶ ECA listed (UK- Enhanced Capital Allowance Scheme)

SMVector IP31 | user interface

Simple Six Button Programming

- ▶ Start
- ▶ Stop
- ▶ Forward/Reverse
- ▶ Scroll Up
- ▶ Scroll Down
- ▶ Enter/Mode



Keypad (up to 7.5 kW)

Informative LED Display

- ▶ Vivid Illumination
- ▶ Easily Read from a Distance

Five Status LEDs

- ▶ Run
- ▶ Automatic Speed mode
- ▶ Manual Speed Mode
- ▶ Forward Rotation
- ▶ Reverse Rotation

Status Display

- ▶ Motor Status
- ▶ Fault Management
- ▶ Operational Information

Additional CTRL Button


Switch between control modes

- ▶ Local-Manual
- ▶ Local-Auto
- ▶ Remote-Manual
- ▶ Remote-Auto

Additional LED Indicators

Define the units being displayed

- ▶ Hz
- ▶ RPM
- ▶ %
- ▶ Amps
- ▶ Units

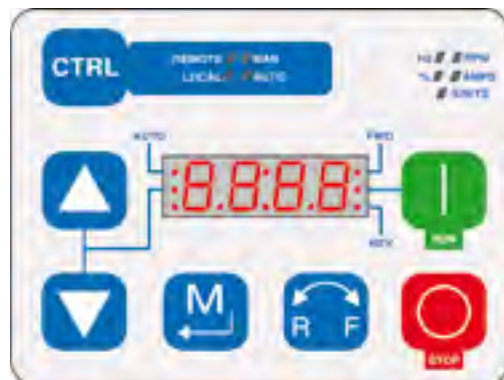

Keypad (11-30 kW)

SMVector IP31 | connectivity

With optional plug-in communication modules, the SMVector is easily integrated into any one of today's most commonly used industrial networks. Whether the application is to automate a single machine or an entire facility.

Setting up a drive in a network has never been so simple. If the SMVector is already installed it can be easily upgraded in the field.



SMVector IP31 | specifications

Control Terminals (Up to 7.5 kW)

Selector switch for negative or positive logic.

Control Terminals

Digital Inputs

- ▶ Dedicated Start/Stop
- ▶ (3) Programmable

Digital Outputs

- ▶ Form "A" Relay
- ▶ Open Collector

Analogue Inputs

- ▶ 0 - 10 VDC
- ▶ 4 - 20 mA

Analogue Outputs

- ▶ 0 - 10 VDC / 2 - 10 VDC

Power Supplies

- ▶ 10 VDC Potentiometer Ref
- ▶ 12 VDC 20 mA Digital Input Ref or 0VDC Common
- ▶ 12 VDC 50 mA Supply Common

EPM
(Electronic Programming Module)

Communication Gateway

Dynamic Brake connection

Control Terminals (11-30 kW)

Selector switch for negative or positive logic.

Control Terminals

Digital Inputs

- ▶ Dedicated Start/Stop
- ▶ (4) Programmable

Digital Outputs

- ▶ Form "A" Relay
- ▶ Open Collector

Analogue Inputs

- ▶ 0 - 10 VDC
- ▶ 4 - 20 mA

Analogue Outputs

- ▶ 0 - 10 VDC/2-10VDC

Power Supplies

- ▶ 10 VDC Potentiometer Ref
- ▶ 12 VDC 20 mA Digital Input Ref or 0VDC Common
- ▶ 12 VDC 50 mA Supply Common

RS-485 Communications

- ▶ TXA
- ▶ TXB

EPM
(Electronic Programming Module)

Communication Gateway

Dynamic Brake connection

SMVector IP31 | options

Optional Remote Keypad

- ▶ Allows operation of the drive from a remote location up to 30 Mtrs from the drive.
- ▶ Cubicle door mountable
- ▶ IP65 rating



ESVZXX1
Remote keypad -
For drives up to 7.5 kW



ESVZXHO
Remote keypad -
For drives 11 - 30 kW

Extended I/O modules

- ▶ **ESVZAL0**
Extends the standard drive with 1 extra programmable form C relay output.
- ▶ **ESVZAL1**
Extends the standard drive with 1 extra programmable form C relay output and 2 extra programmable digital inputs.



External Dynamic Braking Unit



External EMC filter

- ▶ Enables the drive to meet (EN61800-3) (First and second environment, category C1 and C2).



External EMC filters (Schaffner)


Drive Model	Standard Filter 1 Phase	Low Earth Leakage Filter 1 Phase	Standard Filter 3 Phase	Low Earth Leakage Filter 3 Phase	Size
ESV251N01SXB	FS23938-10-07	FS23938-10-07-LL			F1
ESV371N01SXB	FS23938-10-07	FS23938-10-07-LL			F1
ESV751N01SXB	FS23938-17-07	FS23938-17-07-LL			F1
ESV251N02SXB ¹⁾	FS23938-10-07	FS23938-10-07-LL			F1
ESV371N02YXB	FS23938-10-07	FS23938-10-07-LL	FS23939-7-07	FS23939-7-07-LL	F1
ESV751N02YXB	FS23938-10-07	FS23938-10-07-LL	FS23939-7-07	FS23939-7-07-LL	F1
ESV112N02YXB	FS23938-17-07	FS23938-17-07-LL	FS23939-7-07	FS23939-7-07-LL	F1
ESV152N02YXB	FS23938-17-07	FS23938-17-07-LL	FS23939-11-07	FS23939-11-07-LL	F1
ESV222N02YXB	FS23938-17-07	FS23938-17-07-LL	FS23939-11-07	FS23939-11-07-LL	F1
ESV112N02TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV152N02TXB			FS23939-11-07	FS23939-11-07-LL	F1
ESV222N02TXB			FS23939-11-07	FS23939-11-07-LL	F1
ESV402N02TXB			FS23939-19-07	FS23939-19-07-LL	F1
ESV552N02TXB			FS23939-33-07	FS23939-33-07-LL	F2
ESV752N02TXB			FS23939-33-07	FS23939-33-07-LL	F2
ESV113N02TXB			FS23939-59-07	FS23939-59-07-LL	F3
ESV153N02TXB			FS23939-59-07	FS23939-59-07-LL	F3
ESV371N04TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV751N04TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV112N04TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV152N04TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV222N04TXB			FS23939-7-07	FS23939-7-07-LL	F1
ESV402N04TXB			FS23939-11-07	FS23939-11-07-LL	F1
ESV552N04TXB			FS23939-18-07	FS23939-18-07-LL	F2
ESV752N04TXB			FS23939-18-07	FS23939-18-07-LL	F2
ESV113N04TXB			FS23939-35-07	FS23939-35-07-LL	F3
ESV153N04TXB			FS23939-35-07	FS23939-35-07-LL	F3
ESV183N04TXB			FS23939-52-07	FS23939-52-07-LL	F3
ESV223N04TXB			FS23939-52-07	FS23939-52-07-LL	F3
ESV303N04TXB			TBA	TBA	

¹⁾ The model ESV251N02SXB is 1Ø input only.
For 3Ø INPUT use the ESV371N02YXB

Dimensions

Size	H	W	D
	mm	mm	mm
F1	248.4	100	50
F2	307.4	129.5	50
F3	381.4	177.1	50

SMVector IP31 | ratings and dimensions

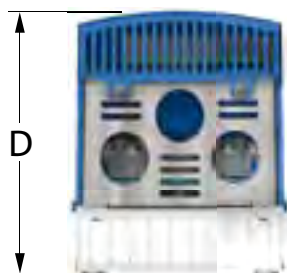

*Bottom Entry with IP31
Steel Conduit Plate*



*Bottom Entry with IP21
Finger Guard*

Dimensions

	H		W		D	
	in.	mm	in.	mm	in.	mm
G1 (0.25-0.75 kW)	7.48	190	3.90	99	4.35	110
G2 (1.1-2.2 kW)	7.52	191	3.90	99	5.45	138
G3 (4.0kW)	7.52	191	3.90	99	5.80	147
H1 (5.5-7.5 kW)	9.83	250	5.12	130	6.30	160
J1 (11.0-22.0 kW)	12.50	318	6.92	176	8.09	206
J2 (30 kW)	14.2	360	8.8	222	10.1	256

SMVector IP31 | ratings and dimensions

120/240V - 1 Φ Input (3 Φ Output)

Model Number	Output Current	Power	Size
	I_N [A]	kW	
ESV251N01SXB	1.7	0.25	G1
ESV371N01SXB	2.4	0.37	G1
ESV751N01SXB	4.2	0.75	G1
ESV112N01SXB	6.0	1.1	G2

Notes:

Output voltage will be twice line voltage when connected to a 120V source.
Output voltage will not exceed line voltage when connected to a 240V source.

200/240V - 1 or 3 Φ Input (3 Φ Output)

Model Number	Output Current	Power	Size
	I_N [A]	kW	
ESV251N02SXB ⁽¹⁾	1.7	0.25	G1
ESV371N02YXB	2.4	0.37	G1
ESV751N02YXB	4.2	0.75	G1
ESV112N02YXB	6.0	1.1	G2
ESV152N02YXB	7.0	1.5	G2
ESV222N02YXB	9.6	2.2	G2

200/240V - 3 Φ Input (3 Φ Output)

Model Number	Output Current	Power	Size
	I_N [A]	kW	
ESV112N02TXB	6.0	1.1	G2
ESV152N02TXB	7.0	1.5	G2
ESV222N02TXB	9.6	2.2	G2
ESV402N02TXB	16.5	4.0	G3
ESV552N02TXB	23	5.5	H1
ESV752N02TXB	29	7.5	H1
ESV113N02TXB	42	11.0	J1
ESV153N02TXB	54	15.0	J1

SMVector IP31 | ratings and dimensions

400/480V - 3Ø Input (3Ø Output)

Model Number	Output Current	Power	Size
	I_N [A]	kW	
ESV371N04TXB	1.3/1.1	0.37	G1
ESV751N04TXB	2.4/2.1	0.75	G1
ESV112N04TXB	3.5/3.0	1.1	G2
ESV152N04TXB	4.0/3.5	1.5	G2
ESV222N04TXB	5.5/4.8	2.2	G2
ESV402N04TXB	9.4/8.2	4.0	G3
ESV552N04TXB	12.6/11	5.5	H1
ESV752N04TXB	16.1/14	7.5	H1
ESV113N04TXB	24/21	11.0	J1
ESV153N04TXB	31/27	15.0	J1
ESV183N04TXB	39/34	18.5	J1
ESV223N04TXB	46/40	22	J1
ESV303N04TXB	60/52	30	J2

480/600V - 3Ø Input (3Ø Output)

Model Number	Output Current	Power	Size
	I_N [A]	kW	
ESV751N06TXB	1.7	0.75	G1
ESV152N06TXB	2.7	1.5	G2
ESV222N06TXB	3.9	2.2	G2
ESV402N06TXB	6.1	4.0	G3
ESV552N06TXB	9	5.5	H1
ESV752N06TXB	11	7.5	H1
ESV113N06TXB	17	11.0	J1
ESV153N06TXB	22	15.0	J1
ESV183N06TXB	27	18.5	J1
ESV223N06TXB	32	22	J1

¹⁾ The model ESV251N02SXB is 1Ø input only.

For 3Ø INPUT use the ESV371N02YXB.

SMVector IP31 | applications

- ▶ Assembly Line
- ▶ Automated Warehousing
- ▶ Automation
- ▶ Automotive
- ▶ Conveying
- ▶ Energy Saving
- ▶ Fans
- ▶ Food
- ▶ Indoor Climate Control
- ▶ Instrumentation
- ▶ Packaging
- ▶ Panel Components
- ▶ Paper
- ▶ Printing
- ▶ Process
- ▶ Production Line
- ▶ Pumps & Compressors
- ▶ Recycling



SMVector IP31 | industries

- ▶ Aggregates
- ▶ Automotive
- ▶ Brewing
- ▶ Food
- ▶ Horticulture
- ▶ HVAC
- ▶ Leisure
- ▶ Printing
- ▶ Woodworking
- ▶ Process
- ▶ Sortation warehouses
- ▶ Wine production
- ▶ Textiles
- ▶ Grinding and finishing
- ▶ Fairground rides

